




HOBO® MX1101 Data Logger

Bluetooth low energy temperature and relative humidity data logger

Onset's HOBO MX1101 is a Low Energy (BLE) data logger that measures and transmits temperature and relative humidity data wirelessly to mobile devices via BLE Smart technology.

The self-contained wireless data logger, which works with Onset's free HOBOMobile® app for logger setup and data management, enables users to access data anytime from their mobile device over a 100-foot range. It communicates instantly and enables you to "cut the cord" by requiring no dedicated equipment beyond a mobile device for configuring the logger or reading out data. This saves considerable time and money.

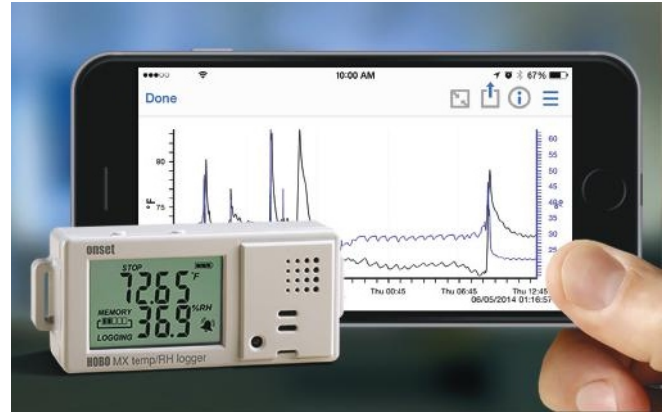

Supported Measurements:

Temperature, Relative Humidity, Dew Point

Key Advantages:

- BLE enabled for use with mobile devices
- No internet access, cables, or computer required
- Download data any time from 100 ft. away
- Audible and visual alarms keep you notified of problems
- Easily share data and graph images for analysis


Minimum System Requirements:



HOBOMobile*



Mobile device

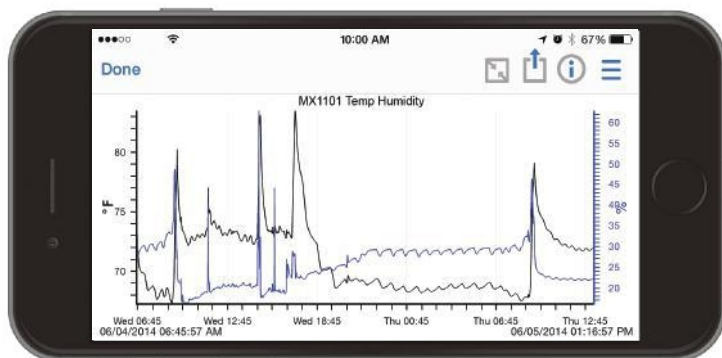

Using Onset's free HOBOMobile® app, you can view data in graphs, check the operational status of loggers, configure alarm notifications, and share data files.

The logger is ideal for use in a range of building monitoring applications, such as tracking storage temperatures in a food warehouse, keeping tabs on humidity levels in a museum, or investigating occupant comfort complaints in an office building.



*iOS 9.2 or 9.3, or Android 4.4, 5.0, 5.1 or 6.0.1 and Bluetooth 4.0 or later

► For complete information and accessories, please visit: www.onsetcomp.com

Part number	MX1101
Memory	84,650 Measurements
Sampling Rate	1 second to 18 hours, user selectable
Battery Life	1 year, typical with logging rate of 1 minute and sampling interval of 15 seconds or greater, user replaceable, 2AAA
Dimensions	3.66 x 8.48 x 2.29 cm (1.44 x 3.34 x 0.9 in.)
Temperature	
Range	-20° to 70°C (-4° to 158°F)
Accuracy	±0.21°C from 0° to 50°C (±0.38°F from 32° to 122°F)
Resolution	0.024°C at 25°C (0.04°F at 77°F)
Response Time	7.30 minutes in air moving 1 m/s (2.2 mph)
Relative Humidity	
Range	1% - 90%RH, non-condensing
Accuracy	±2.0% from 20%RH to 80%RH typical to a maximum of ±4.5% including hysteresis at 25°C (77°F); below 20%RH and above 80%RH ±6% typical
Hysteresis	±2% RH
Resolution	0.01%RH
Response Time	20 seconds to 90% in air moving of 1 m/s (2.2 mph)
CE compliant	Yes

Note: Temp & RH NIST certification services available for this product. Please visit onsetcomp.com, or call us at 1-800-564-4377.

Contact Us

Sales (8am to 5pm ET, Monday through Friday)

- Email sales@onsetcomp.com
- Call 1-508-759-9500
- In U.S. toll free 1-800-564-4377
- Fax 1-508-759-9100

Technical Support (8am to 8pm ET, Monday through Friday)

- Contact Product Support onsetcomp.com/support/contact
- Call 1-508-759-9500
- In U.S. toll free 1-877-564-4377

Onset Computer Corporation
470 MacArthur Boulevard
Bourne, MA 02532



METRICS

Metrics GmbH • Elberfelder Str. 19-21 • 58095 Hagen
Telefon: 02331 3483086 • Telefax: 02331 3483088
E-Mail: info@metrics24.de • <https://www.metrics24.de>